


15/20W RM Motor

Key Features

- Motor inserts directly into roller tube
- Fits most 100mm axles with min ID 94mm
- Equipped with a heavy duty integral mounting plate approximately 43/4" square
- Torque rating 200 Nm (1770 inch pounds)
- Built-in limit switch, easy to set endstops
- Compact Mounting
- Motor to plate 11/8"
- UL recognized motor

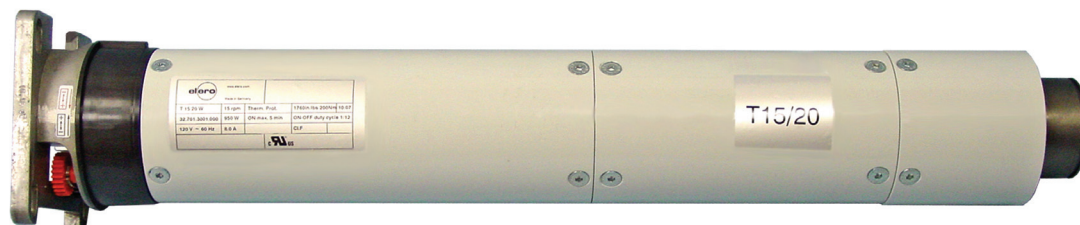

Elero shutter/door motors offer a unique time and space savings advantage when powering industrial rolling doors. They completely eliminate the need for compensation springs. For door weight up to 500 pounds, the 120 volt motor delivers a torque of 1,770 inch-pounds depending on roll diameter and lift height. The motors are equipped with fully automatic holding brakes and can be equipped with a fail-safe inertia brake as an extra safeguard in case of any mechanical failure. Because these tubular motors are inserted into the roller tube, they offer very important space savings as well.

Technical Features

- 917 lb. lift from barrel
- 25" nominal length
- 12-turn limit range
- 200 Newton meters
- 15 rpm
- 950 watts
- 8 amps
- 120V/60Hz

Model and Item Numbers

15/20W Motor	32.701.3001
Common Drive	13.103.5701

Refer to parts list for other available crown & drive sets

Dimensions

